




A-342CT
Master Links

- Alloy Steel - Quenched and Tempered
- Individually proof tested at 2 times Working Load Limit with certification
- Finish is Inorganic Zinc Primer.
- Certified to meet charpy impact testing of 42J. min. avg. at -20° C.
- Individually serialized and all certification shipped with each link
- COLD TUFF® master links are suitable for use at -46° C.
- Type Approval and certification in accordance with DNV 2.7-1 O fshore Containers, DNV-OS-E101, and Rules for Certification of Lifting Appliances, and are produced in accordance with DNV MSA requirements, including required documents.
- Refer to page 88 for COLD TUFF® Shackles.
- Meets or exceeds all requirements of ASME B30.26 including identification, ductility, design factor, proof load and temperature requirements. Importantly, these fittings meet other critical performance requirements including fatigue life, impact properties and material traceability, not addressed by ASME B30.26.

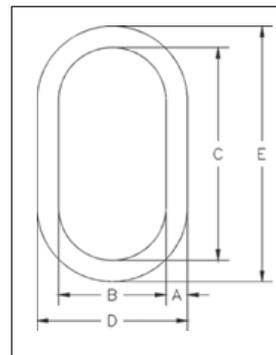

A-342CT Master Links


Size (mm)	A-342CT Stock No.	Working Load Limit (t)*	Weight Each (kg)	Dimensions (mm)					Deformation Indicator
				A	B	C	D	E	
31.8W	1261407	15.9	5.44	33.8	140	241	207	309	178
38.1W	1261418	27.7	8.44	40.9	149	267	231	348	191
44.5	1261423	28.3	11.4	44.5	152	305	241	394	191
51.0	1261433	44.3	16.8	51.0	178	356	279	457	229

*Minimum Ultimate Load is 5 times the Working Load Limit.



A-345CT
Master Links
Assembly

- Alloy Steel - Quenched and Tempered
- Individually proof tested at 2 times Working Load Limit with certification
- Finish is Inorganic Zinc Primer.
- Certified to meet charpy impact testing of 42J. min. avg. at -20° C
- COLD TUFF® master links are suitable for use at -46° C.
- Type Approval and certification in accordance with DNV 2.7-1 O fshore Containers, DNV-OS-E101, and Rules for Certification of Lifting Appliances, and are produced in accordance with DNV MSA requirements, including required documents.
- Refer to page 88 for COLD TUFF® Shackles.
- Meets or exceeds all requirements of ASME B30.26 including identification, ductility, design factor, proof load and temperature requirements. Importantly, these fittings meet other critical performance requirements including fatigue life, impact properties and material traceability, not addressed by ASME B30.26.

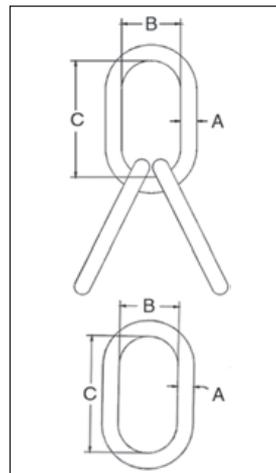

A-345CT Master Link Assembly

Size (mm)	A-345CT Stock No.	Working Load Limit (t)*	Weight Each (kg)	Dimensions (mm)		
				A	B	C
31.8	1261609	15.9	13.6	31.8	111	222
38.1	1261620	21.7	23.1	38.1	133	267
44.5	1261631	28.3	35.4	44.5	152	305
51.0	1261642	44.3	56	51.0	178	356

*Minimum Ultimate Load is 5 times the Working Load Limit.